



# BOSCH REXROTH

CABLE ASSEMBLIES ACCORDING TO BOSCH REXROTH STANDARD

TANNER WIRE | CONNECTIVITY SOLUTIONS



TANNER, INC. WIRE AND CABLE SPECIALISTS CARRIES A FULL LINE OF COMPLIMENTARY PRODUCTS FOR ALL OF THEIR WIRE AND CABLE SOLUTIONS. CALL US FOR CONNECTORS (MIL SPEC AND RECTANGULAR), CABLE TRAY, TERMINATION KITS, FITTINGS, HARDWARE AND MORE.

28045 RANNEY PARKWAY SUITE E | WESTLAKE, OH 44145 | 440-808-8841 | SALES@TANNERWIRE.COM

CHECK US OUT ONLINE: [WWW.TANNERWIRE.COM](http://WWW.TANNERWIRE.COM)






# BOSCH REXROTH

CABLE ASSEMBLIES ACCORDING TO BOSCH REXROTH STANDARD

TANNER WIRE | CONNECTIVITY SOLUTIONS


## Cable Solutions

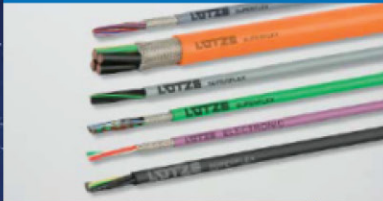

## Connectivity Solutions



## Cabinet Solutions

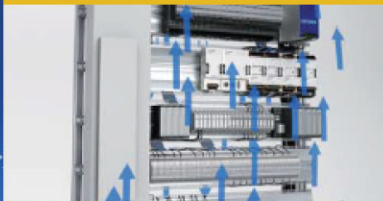

## Control Solutions



## Transportation Solutions



Tanner Wire has been developing and manufacturing electronic and electrical engineering solutions for controls and installations for more than 50 years.

Our basic concept as system suppliers, providing a comprehensive and well-matched product range with which we can generate innovative and customized solutions for our customers, has stood the test of time.

Cable assembly according to BOSCH REXROTH standard.

Cover your entire needs for all aspects of your application from a single source. Tanner Wire assembles cables that are 100-percent compatible with the BOSCH REXROTH standard. As rugged as needed and always in the right length, in 0.5 m increments. There is no minimum order amount, delivery times are short and there is a cost-effective price/performance ratio.

Tanner Wire systems comply with the highest industrial standards; Tanner Wire solutions mean improvement and innovation.

**Our solutions include components and concepts suitable for almost any control application. For more information on our solutions, please visit [www.tannerwire.com](http://www.tannerwire.com)**

28045 RANNEY PARKWAY SUITE E | WESTLAKE, OH 44145 | 440-808-8841 | SALES@TANNERWIRE.COM

CHECK US OUT ONLINE: [WWW.TANNERWIRE.COM](http://WWW.TANNERWIRE.COM)





# BOSCH REXROTH

CABLE ASSEMBLIES ACCORDING TO BOSCH REXROTH STANDARD

TANNER WIRE | CONNECTIVITY SOLUTIONS

## Servomotor cables for C-tracks

According to Bosch Rexroth RKL standard



### Application

- Motor cable for Bosch Rexroth SERVO drives
- Full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely rough operating conditions, aggressive coolants and lubricants

### Properties

- Silicone free
- RoHS-compliant

### Technical data

UL approval	cURus
Nominal voltage	1000 V 80 °C
Voltage	
U <sub>0</sub> /U	0.6/1 kV
Insulation resistance	min. 500 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 8
Burning behavior	Flame-retardant according to VDE 0482 T 285-2, DIN EN 50265/2, IEC 60332-1, UL 1581 section 1080 VW-1 CSA FT 1
Halogen free	according to DIN EN 50267-2-1
Product photo	The product photos are not to scale and do not represent detailed images of the respective products.

### Construction

- Jacket color orange RAL 2003



Part-No.	BOSCH REXROTH designation*	Length m	Number of conductors/ cross-section	Outer Ø ca. mm
<b>Base cable</b>				
193262.1000	RKL0014	10.0	(4G1.0+2x(2x0.75))	12.5
193089.1000	RKL0015	10.0	(4G1.5+2x(2x0.75))	12.9
193090.1000	RKL0016	10.0	(4G1.5+2x(2x0.75))	12.9
193091.1000	RKL0017	10.0	(4G1.5+2x(2x0.75))	12.9
193092.1000	RKL0018	10.0	(4G2.5+2x(2x1.0))	14.2
193093.1000	RKL0019	10.0	(4G1.0+2x(2x0.75))	12.5
193095.1000	RKL0046	10.0	(4G2.5+2x(2x1.0))	14.2
193097.1000	RKL4349	10.0	(4G6+(2x1.0)+(2x1.5))	18.4
193098.1000	RKL0050	10.0	(4G1.5+2x(2x0.75))	12.9
193100.1000	RKL0052	10.0	(4G2.5+2x(2x1.0))	14.2
193101.1000	RKL0053	10.0	(4G1.0+2x(2x0.75))	12.5
193105.1000	RKL0057	10.0	(4G2.5+2x(2x1.0))	14.2
193106.1000	RKL0058	10.0	(4G4+(2x1.0)+(2x1.5))	16.3
193125.1000	RKL4300	10.0	(4G1.5+2x(2x0.75))	12.9
193107.1000	RKL4301	10.0	(4G1.5+2x(2x0.75))	12.9
193240.1000	RKL4302	10.0	(4G1.0+2x(2x0.75))	12.5
193258.1000	RKL4303	10.0	(4G1.0+2x(2x0.75))	12.5
193241.1000	RKL4306	10.0	(4G1.5+2x(2x0.75))	12.9
193273.1000	RKL4307	10.0	(4G1.5+2x(2x0.75))	12.9
193242.1000	RKL4308	10.0	(4G2.5+2x(2x1.0))	14.2
193243.1000	RKL4309	10.0	(4G2.5+2x(2x1.0))	14.2
193244.1000	RKL4310	10.0	(4G2.5+2x(2x1.0))	14.2
193108.1000	RKL4313	10.0	(4G4+(2x1.0)+(2x1.5))	16.3
193257.1000	RKL4314	10.0	(4G4+(2x1.0)+(2x1.5))	16.3
193109.1000	RKL4315	10.0	(4G4+(2x1.0)+(2x1.5))	16.3
193246.1000	RKL4317	10.0	(4G6+(2x1.0)+(2x1.5))	18.4
193247.1000	RKL4318	10.0	(4G6+(2x1.0)+(2x1.5))	18.4
193276.1000	RKL4345	10.0	(4G2.5+2x(2x1.0))	14.2
193119.1000	RKL4346	10.0	(4G2.5+2x(2x1.0))	14.2
<b>Extension</b>				
193278.1000	RKL4304	10.0	(4G1.5+2x(2x0.75))	12.9
193616.1000	RKL4305	10.0	(4G1.0+2x(2x0.75))	12.5
193263.1000	RKL4311	10.0	(4G1.5+2x(2x0.75))	12.9
193245.1000	RKL4312	10.0	(4G2.5+2x(2x1.0))	14.2
193110.1000	RKL4316	10.0	(4G4+(2x1.0)+(2x1.5))	16.3
193279.1000	RKL4319	10.0	(4G6+(2x1.0)+(2x1.5))	18.4
193120.1000	RKL4347	10.0	(4G2.5+2x(2x1.0))	14.2

28045 RANNEY PARKWAY SUITE E | WESTLAKE, OH 44145 | 440-808-8841 | SALES@TANNERWIRE.COM

CHECK US OUT ONLINE: WWW.TANNERWIRE.COM







# BOSCH REXROTH

CABLE ASSEMBLIES ACCORDING TO BOSCH REXROTH STANDARD

TANNER WIRE | CONNECTIVITY SOLUTIONS

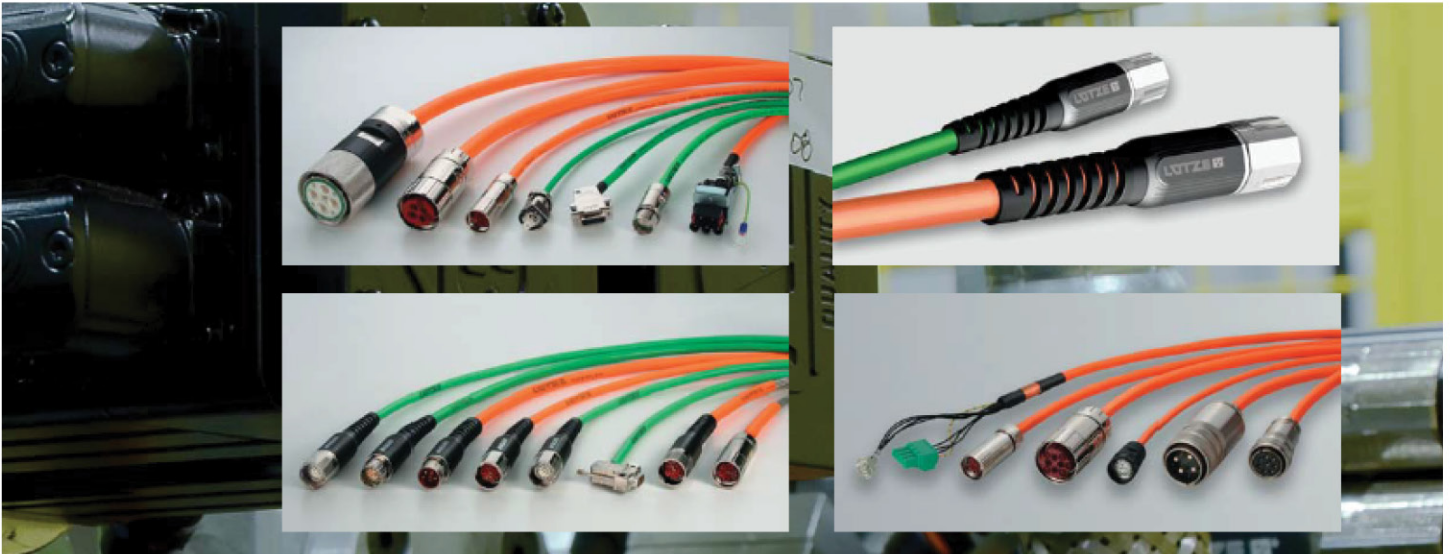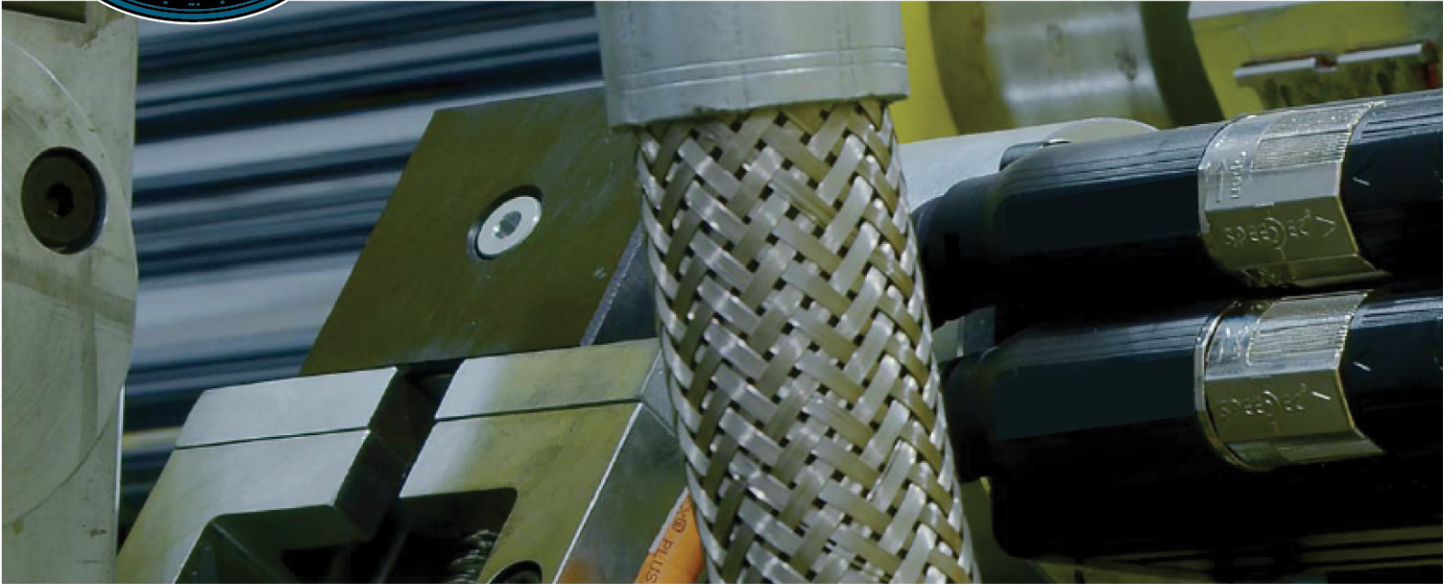

28045 RANNEY PARKWAY SUITE E | WESTLAKE, OH 44145 | 440-808-8841 | SALES@TANNERWIRE.COM

CHECK US OUT ONLINE: [WWW.TANNERWIRE.COM](http://WWW.TANNERWIRE.COM)





# BOSCH REXROTH

CABLE ASSEMBLIES ACCORDING TO BOSCH REXROTH STANDARD

TANNER WIRE | CONNECTIVITY SOLUTIONS

## Servomotor cables for C-tracks

According to Bosch Rexroth RKL standard



**Application**

- Motor cable for Bosch Rexroth SERVO drives
- Full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely rough operating conditions, aggressive coolants and lubricants

**Properties**

- Silicone free
- RoHS-compliant

**Technical data**

UL approval	cURus
Nominal voltage	1000 V 80 °C
Voltage	
U <sub>0</sub> /U	0.6/1 kV
Insulation resistance	min. 500 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 10
fixed	D × 6
Burning behavior	Flame-retardant according to VDE 0482 T 285-2, DIN EN 50265/2, IEC 60332-1, UL 1581 section 1080 VW-1 CSA FT 1
Halogen free	according to DIN EN 50267-2-1
Product photo	The product photos are not to scale and do not represent detailed images of the respective products.

**Construction**

- Jacket color orange RAL 2003

Part-No.	BOSCH REXROTH designation*	Length m	Number of conductors/ cross-section	Outer Ø ca. mm
<b>Base cable</b>				
193094.1000	RKL0045	10.0	(4G1,5+2×(2×0,75))	12.9
193099.1000	RKL0051	10.0	(4G2,5+2×(2×1,0))	14.2
193102.1000	RKL4354	10.0	(4G1,5+2×(2×0,75))	12.9
193103.1000	RKL0055	10.0	(4G8+(2×1,0)+(2×1,5))	18.4
193104.1000	RKL0058	10.0	(4G4+(2×1,0)+(2×1,5))	16.3
193259.1000	RKL4320	10.0	(4G1,5+2×(2×0,75))	12.9
193252.1000	RKL4321	10.0	(4G2,5+2×(2×1,0))	14.2
193282.1000	RKL4322	10.0	(4G4+(2×1,0)+(2×1,5))	16.3
193248.1000	RKL4323	10.0	(4G8+(2×1,0)+(2×1,5))	18.4
193249.1000	RKL4324	10.0	(4G10+(2×1,0)+(2×1,5))	22.3
193272.1000	RKL4325	10.0	(4G1,5+2×(2×0,75))	12.9
193111.1000	RKL4326	10.0	(4G2,5+2×(2×1,0))	14.2
193112.1000	RKL4327	10.0	(4G4+(2×1,0)+(2×1,5))	16.3
193250.1000	RKL4328	10.0	(4G8+(2×1,0)+(2×1,5))	18.4
193251.1000	RKL4329	10.0	(4G10+(2×1,0)+(2×1,5))	22.3
193254.1000	RKL4331	10.0	(4G25+2×(2×1,5))	29.3
193113.1000	RKL4332	10.0	(4G35+2×(2×1,5))	32.5
193114.1000	RKL4333	10.0	(4G25+2×(2×1,5))	29.3
193115.1000	RKL4334	10.0	(4G35+2×(2×1,5))	32.5
193260.1000	RKL4343	10.0	(4G2,5+2×(2×1,0))	14.2
193118.1000	RKL4344	10.0	(4G18+2×(2×1,5))	28.8
193121.1000	RKL4349	10.0	(4G18+2×(2×1,5))	28.8
193122.1000	RKL4387	10.0	(4G35+2×(2×1,5))	32.5
193123.1000	RKL4778	10.0	(4G35+2×(2×1,5))	32.5
193124.1000	RKL4785	10.0	(4G25+2×(2×1,5))	29.3
<b>Extension</b>				
193116.1000	RKL4335	10.0	(4G1,5+2×(2×0,75))	12.9
193004.1000	RKL4336	10.0	(4G2,5+2×(2×1,0))	14.2
193255.1000	RKL4337	10.0	(4G4+(2×1,0)+(2×1,5))	16.3
193256.1000	RKL4338	10.0	(4G8+(2×1,0)+(2×1,5))	18.4
193270.1000	RKL4339	10.0	(4G10+(2×1,0)+(2×1,5))	22.3
193271.1000	RKL4340	10.0	(4G18+2×(2×1,5))	28.8
193264.1000	RKL4341	10.0	(4G25+2×(2×1,5))	29.3
193117.1000	RKL4342	10.0	(4G35+2×(2×1,5))	32.5



# BOSCH REXROTH

CABLE ASSEMBLIES ACCORDING TO BOSCH REXROTH STANDARD

TANNER WIRE | CONNECTIVITY SOLUTIONS

## Servomotor cables for C-tracks

According to Bosch Rexroth IKG standard



### Application

- Motor cable for Bosch Rexroth SERVO drives
- Full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely rough operating conditions, aggressive coolants and lubricants

### Properties

- Silicone free
- RoHS-compliant

### Technical data

Nominal voltage	1000 V 80 °C
Voltage	
U <sub>p</sub> /U	0.6/1 kV
Insulation resistance	min. 500 MΩ x km
Minimum bending radius	
moving	D x 10
fixed	D x 6
Burning behavior	Flame-retardant according to VDE 0482 T 285-2, DIN EN 50265/2, IEC 60332-1, UL 1581 section 1080 VW-1 CSA FT 1
Halogen free	nach DIN EN 50267-2-1
Product photo	The product photos are not to scale and do not represent detailed images of the respective products.

### Construction

- Jacket color orange RAL 2003

Part-No.	BOSCH REXROTH designation*	Length m	Number of conductors/ cross-section	Outer Ø ca. mm
<b>Base cable</b>				
193028.1000	IKG4115	10.0	(4G1,5+2x(2x0,75))	12.9
193029.1000	IKG4116	10.0	(4G2,5+2x(2x1,0))	14.2
193054.1000	IKG4117	10.0	(4G4+(2x1,0)+(2x1,5))	18.3
193055.1000	IKG4118	10.0	(4G6+(2x1,0)+(2x1,5))	18.4
193037.1000	IKG4175	10.0	(4G10+(2x1,0)+(2x1,5))	22.3
193030.1000	IKG4138	10.0	(4G6+(2x1,0)+(2x1,5))	18.4
193062.1000	IKG4176	10.0	(4G10+(2x1,0)+(2x1,5))	22.3
193031.1000	IKG4140	10.0	(4G1,5+2x(2x0,75))	12.9
193060.1000	IKG4139	10.0	(4G2,5+2x(2x1,0))	14.2
193038.1000	IKG4177	10.0	(4G4+(2x1,0)+(2x1,5))	18.3
193039.1000	IKG4215	10.0	(4G6+(2x1,0)+(2x1,5))	18.4
193077.1000	IKG4169	10.0	(4G10+(2x1,0)+(2x1,5))	22.3
193032.1000	IKG4155	10.0	(4G6+(2x1,0)+(2x1,5))	18.4
193078.1000	IKG4168	10.0	(4G10+(2x1,0)+(2x1,5))	22.3
193061.1000	IKG4172	10.0	(4G16+2x(2x1,5))	28.8
193035.1000	IKG4173	10.0	(4G25+2x(2x1,5))	29.3
193036.1000	IKG4174	10.0	(4G35+2x(2x1,5))	32.5
193033.1000	IKG4620	10.0	(4G25+2x(2x1,5))	29.3
193079.1000	IKG4621	10.0	(4G35+2x(2x1,5))	32.5



# BOSCH REXROTH

CABLE ASSEMBLIES ACCORDING TO BOSCH REXROTH STANDARD

TANNER WIRE | CONNECTIVITY SOLUTIONS

## Signal cables for C-tracks

According to Bosch Rexroth IKS standard



Part-No.	BOSCH REXROTH designation*	Length m	Number of conductors/ cross-section	Outer Ø ca. mm
<b>Base cable</b>				
193128.1000	RKG0030	10.0	(2×1,0+4×2×0,25)	8.9
193034.1000	RKG4200	10.0	(2×0,5+4×2×0,25)	8.7
193088.1000	RKG4202	10.0	(2×0,5+4×2×0,25)	8.7
193164.1000	IKS4038	10.0	(2×(0,5)+3×(2×0,14))	8.7
<b>Extension</b>				
193001.1000	RKG4201	10.0	(2×0,5+4×2×0,25)	8.7

### Application

- Signal cables
- Due to full PUR jacket and TPE conductor insulation optimally suited for c-track, extremely rough operating conditions, aggressive coolants and lubricants

### Properties

- Silicone free
- RoHS-compliant

### Technical data

UL approval	cURus
Nominal voltage	300 V 80 °C
Voltage	
U <sub>0</sub> /U	0.6/1 kV
Insulation resistance	min. 200 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behavior	Flame-retardant according to VDE 0482 T 285-2, DIN EN 50265/2, IEC 60332-1, UL 1581 section 1080 VW-1 CSA FT 1
Halogen free	according to DIN EN 50267-2-1
Product photo	The product photos are not to scale and do not represent detailed images of the respective products.

### Construction

- Jacket color orange RAL 2003



# BOSCH REXROTH

CABLE ASSEMBLIES ACCORDING TO BOSCH REXROTH STANDARD

TANNER WIRE | CONNECTIVITY SOLUTIONS

## PVC servo cables · C-track compatible · shielded

### LÜTZE SUPERFLEX® PLUS M (C) PUR SERVO 0.6/1 kV

Supply line for Bosch Rexroth and other systems  
For highest requirements



#### Application

- For Indramat® system (and similar)
- Connection cable motor/brake especially for frequency converters and SERVO drives in machine and plant construction, transport and conveyor technology
- Due to Full PUR jacket and TPE / HGI conductor insulation optimally suited for c-tracks, extremely rough operating conditions and aggressive coolants and lubricants
- Especially for industrial environments in mechanical and system engineering

#### Properties

- High active and passive interference resistance (EMC)
- Braided shield optimised for continuous flexible use
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weatherproof, ozone and UV resistant (normal lighting conditions)
- Good ruggedness and salt water resistance
- Excellent coolant and lubricant resistance
- Resistant to most oils, greases, alcohol-free benzines and kerosene
- Silicone free
- RoHS compliant

#### Technical data

UL approval	AWM 21223
Nominal voltage	1000 V 80 °C
Voltage U <sub>0</sub> /U	0.6/1 kV
Test voltage	4000 V
Insulation resistance	min. 500 MΩ x km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D x 10
fixed	D x 6
Burning behavior	Flame-retardant according to IEC 60332-1-2, EN 50265-1-2, UL 1581, CSA C22.2 No. 210.2 Flame Rating FT1
Halogen free	according IEC 60754-1, EN 50267-2-1

#### Construction

- Bare copper wire, super finely stranded according to DIN VDE 0295 class 6, IEC 60228 class 6
- Conductor insulation Special TPE, high glide
- Power conductors black with number print (1, 2, 3)
- Ground conductor green/yellow according to DIN EN 50334
- G = with green/yellow ground conductor, x = without ground conductor
- Control pairs digits printing (5, 6) (7, 8)
- Control pair with braided shield and foil tape
- Conductors cabled in layers without mechanical stress, layer pitch optimised
- Fleece wrap over cable core
- Braid from tinned copper wire, optical coverage ≥ 85 %
- Jacket special-PUR, matte, adhesion-free surface
- Jacket color orange RAL 2003

Part-No.	Number of conductors/cross-section	INK* Description	Outer Ø ca. mm	Weight kg/100 m	Cu-Index kg/100 m
<b>Construction with two control pairs</b>					
111719	(4G0,75+2x(2x0,34))	-----	11.2	17.7	9.5
111270	(4G1.0+2x(2x0.75))	INK 0853	12.5	23.2	13.8
111271	(4G1.5+2x(2x0.75))	INK 0850	12.9	25.5	16.2
111279	(4G2.5+2x(2x1.0))	INK 0802	14.2	33.0	22.6
111388	(4G4+(2x1.0)+(2x1.5))	INK 0803	16.3	38.0	32.9
111998	(4G6+(2x1.0)+(2x1.5))	INK 0804	18.4	53.0	38.5
111762	(4G10+(2x1.0)+(2x1.5))	INK 0805	22.3	76.5	57.0
111278	(4G16+2x(2x1.5))	INK 0806	26.8	108.4	89.1
111277	(4G25+2x(2x1.5))	INK 0807	29.3	171.4	128.0
111278	(4G35+2x(2x1.5))	INK 0867	32.5	217.8	164.0

28045 RANNEY PARKWAY SUITE E | WESTLAKE, OH 44145 | 440-808-8841 | SALES@TANNERWIRE.COM

CHECK US OUT ONLINE: WWW.TANNERWIRE.COM








# BOSCH REXROTH

CABLE ASSEMBLIES ACCORDING TO BOSCH REXROTH STANDARD

TANNER WIRE | CONNECTIVITY SOLUTIONS

## PUR feedback cables · C-track compatible

**LÜTZE SUPERFLEX® PLUS (C) PUR FEEDBACK**  
**Feedback cables for Bosch-Rexroth and other systems**  
**For highest requirements in drive technology**



### Application

- Incremental encoder cable, connection cable for tacho sensor, brake sensor, speed sensor
- Due to Full PUR jacket and TPE conductor insulation optimally suited for c-tracks, extremely rough operating conditions and aggressive coolants and lubricants
- Especially for industrial environments in mechanical and system engineering

### Properties

- High active and passive interference resistance (EMC)
- Braided shield optimised for continuous flexible use
- Very good alternating bending strength
- Low adhesion, abrasion-resistant, nick-resistant, tear-propagation-resistant
- Hydrolysis-resistant, microbe-resistant, and rot-resistant
- Weatherproof, ozone and UV resistant (normal lighting conditions)
- Good ruggedness and salt water resistance
- Excellent coolant and lubricant resistance
- Resistant to most oils, greases, alcohol-free benzines and kerosene
- Silicone free
- RoHS compliant

### Technical data

UL approval	AWM 20233
Nominal voltage	300 V 80 °C
Test voltage	2000 V
Insulation resistance	min. 200 MΩ × km
Temperature range	
moving	-25 °C to +80 °C
fixed	-40 °C to +80 °C
Minimum bending radius	
moving	D × 12
fixed	D × 6
Burning behavior	Flame-retardant according to VDE 0482 part 265-2, DIN EN 50265-2, IEC 60332-1, UL 1581 section 1080 VW-1, CSA FT 1
Halogen free	according to EN 50267-2-1

### Construction

- Bare copper wire, super finely stranded according to DIN VDE 0295 class 6, IEC 60228 class 6
- Conductor insulation Special-TPE
- Conductors color-coded for specific system
- Conductors cabled in layers without mechanical stress, layer pitch optimised
- Fleece wrap over cable core
- Braid from tinned copper wire, optical coverage ≥ 85 %
- Jacket special-PUR, matte, adhesion-free surface
- Jacket color orange RAL 2003

Part-No.	Number of strands/cross-section/ strand colors	INK* De- scription	Outer Ø ca. mm	Weight kg/100 m	Cu-Index kg/100 m
<b>For Bosch-Rexroth system (and similar)</b>					
110941	(2×1.0+4×2×0.25) 1.0: white, brown 0.25: brown/green, grey/pink, blue/violet, red/black	INK-0209*	8.9	12.0	6.4
111780	(2×0.5+4×2×0.25) 0.5: white, brown 0.25: brown/green, grey/pink, blue/violet, red/black	INK-0448*	8.7	10.0	5.9
110940	(9×0.5) Strand color according to DIN 47100	INK-0208*	8.8	12.5	7.5
111495	(4×1.0+4×2×0.14+(4×0.14)) 1.0: blue, whitegreen, brown/green, white 0.14: grey/pink, yellow/violet, green/brown, red/black (0.14): green/black, blue/black, yellow/black, red/black	INK-0532*	9.5	13.7	9.6
111781	(2×2×0.25+2×0.5) 0.5: white, brown 0.25: red/black, gray, pink	INK-0750*	7.6	9.0	4.2



# BOSCH REXROTH

CABLE ASSEMBLIES ACCORDING TO BOSCH REXROTH STANDARD

TANNER WIRE | CONNECTIVITY SOLUTIONS

## Handling and Installation

### 1. Selecting Cables for Continuous Motion Applications – C-Tracks

We recommend special high flexing cables

- cable is proven to be compatible with all major brands of C-tracks.
- N is designed for moderate flexing in short to medium length C-tracks.
- Plus PUR is designed for high performance flexing or longer C-tracks.

High Flexing Cables

#### Standard Flexible Cables



*long pitch*

- Low number of strands per conductor
- longer pitch layering
- designed as a pliable cable for easy routing and installation



Static



Periodical Free Flexing





Bend & Route

#### High Flexing Cables



*short pitch, layered design with control core*

- high number of super fine strands per conductor
- short pitch layering
- conductors are cabled without mechanical back twist
- higher quality of materials
- slower and more complex manufacturing process on high-end equipment
- designed for linear constant flexing



28045 RANNEY PARKWAY SUITE E | WESTLAKE, OH 44145 | 440-808-8841 | SALES@TANNERWIRE.COM

CHECK US OUT ONLINE: [WWW.TANNERWIRE.COM](http://WWW.TANNERWIRE.COM)



# BOSCH REXROTH

CABLE ASSEMBLIES ACCORDING TO BOSCH REXROTH STANDARD

TANNER WIRE | CONNECTIVITY SOLUTIONS

## Handling and Installation

### 2. Correct Handling

When unreeling the cable, do not change the bend direction. The cable has to go on the new reel in the same direction it came off the reel. Low and equal tensile force during spooling!




✓ Do



✗ Do Not

Ring put ups require careful uncoiling by rolling the ring upright over the floor



✓ Do




✗ Do Not


Do not twist the cable when unwinding. always unwind straight from spool.

### 3. Correct Installation

Cable retains bend from reel. Do not flex against original bend or relax cable for 24 hrs by laying it flat.



✓ Do




✗ Do Not

Use dividers horizontally and vertically to separate the track into separate cavities. Install just one cable per separated cavity. If absolutely necessary, two small or a small and a big cable can share a cavity.




Try to ensure balanced weight distribution. If you have more than one heavy cable, we recommend installing the heavy cables evenly to each side of the track.

Observe the minimum bending radius for optimum performance. Make sure that all cables are length-adjusted and run in the neutral zone.

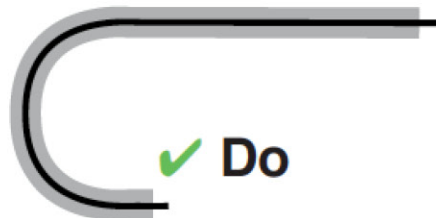


✓ Do

*optimal length adjustment*



✗ Do Not

*length adjustment too short*



✗ Do Not

*length adjustment too long*



# BOSCH REXROTH

CABLE ASSEMBLIES ACCORDING TO BOSCH REXROTH STANDARD

TANNER WIRE | CONNECTIVITY SOLUTIONS



Cables and Cords

Cable Assembly

C-Tracks

Cable Fittings

LSC-Wiring-System

Module- and  
Interface Technology

Suppression Technology

Power Supplies

Railway-Technology

## TANNER WIRE

28045 RANNEY PARKWAY SUITE E

WESTLAKE, OH 44145

440-808-8841

SALES@TANNERWIRE.COM

CHECK US OUT ONLINE: [WWW.TANNERWIRE.COM](http://WWW.TANNERWIRE.COM)

