



Broadband Coax - RG6 Dual and Quad Shield

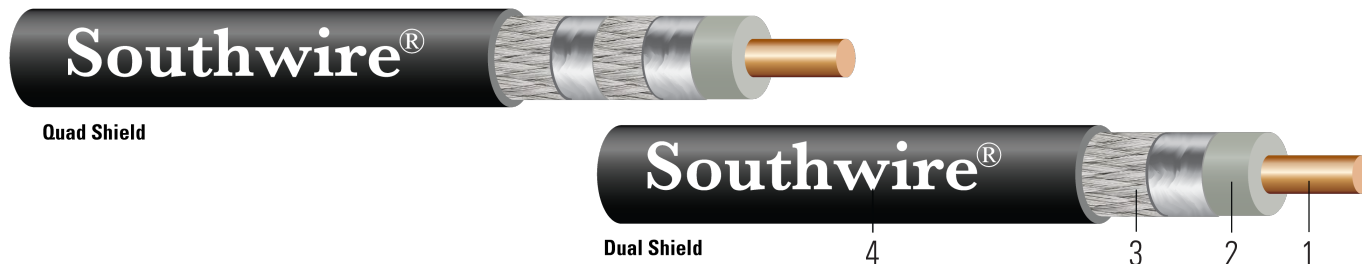


Image not to scale. See Table 1 for dimensions.

CONSTRUCTION:

Non-Plenum Rated

1. **Conductor:** Bare copper or copper clad steel
2. **Insulation:** Polyethylene
3. **Shield:** Aluminum foil and braid shielded
4. **Jacket:** Polyvinyl Chloride PVC.

Plenum Rated

1. **Conductor:** Bare copper or copper clad steel
2. **Insulation:** Foamed Fluoropolymer
3. **Shield:** Aluminum foil and braid shielded
4. **Jacket:** Low smoke Polyvinyl Chloride PVC. Polyethylene for outdoors

APPLICATIONS AND FEATURES:

- CATV Applications for distributing television signals
- ALUMINUM BRAID CCTV Applications for surveillance
- Connecting security cameras, DVR or monitor using "BNC" connectors
- COPPER BRAID
- 75 Ohms Impedance

SPECIFICATIONS:

- UL 910 Test for Flame-Propagation & Smoke-Density Values for Electrical & Optical-Fiber Cable
- UL 1581 Standard for Electrical Wires, Cables, and Flexible Cords



SAMPLE PRINT LEGEND:

{SQFTG} TANNER SIGNAL 92045 XX AWG RG6/U (UL) CL2 SUN RES. {SQFTG}

TANNER SIGNAL 92001 RG6 XX AWG CCS DUAL SHIELD 40% AL BRAID (UL) CM OR CL2 OR CATV 75°C
SUN RES SWEPT TO 3.0 GHZ

{SQFTG} TANNER SIGNAL PLENUM RG6 XX AWG BC DUAL SHIELD 90% AL BRAID 921007 C(ETL)US CMP OR
CL2P FT6 75°C SWEPT TO 3.0 GHZ

{SQFTG} TANNER SIGNAL 920413 RG6 XX AWG CCS QUAD SHIELD 40/60% AL BRAID C(ETL)US CMR OR CL2R OR
CATVR 75°C -- TYPE CMG FT4 SUN RES SWEPT TO 3.0 GHZ

{SQFTG} TANNER SIGNAL 992479 RG6 XX AWG CCS DUAL SHIELD 60% AL BRAID DIRECT BURIAL FLOODED
SWEPT TO 3.0 GHZ



Table 1 – Physical and Electrical Data

Stock Number	Cable Type	Rating	Cond. Size	Cond. Number	Cond. Type	Cond. Strands	Insul. Thickness	Jacket Thickness	Approx. OD	Approx. Weight	Shield Type
			AWG	No.		strands	mil	mil	inch	lb /1000ft	
RG6											
20CXDQ-RG6-CM-1	RG6	CM/CL2/ UL-1581	18	1	BC	Solid	70	30	0.268	36	Copper Braid
20CXDQ-RG6-CM-2	RG6	CM/CL2/ UL-1581	18	1	CCS	Solid	70	30	0.270	23	Dual
20CXDQ-RG6-CM-3	RG6	CM/CL2/ UL-1581	18	1	CCS	Solid	70	30	0.270	25	Dual
20CXDQ-RG6-CM-4	RG6	CM/CL2/ UL-1581	18	1	CCS	Solid	70	30	0.275	26	Quad
20CXDQ-RG6-CM-5	RG6	CM/CL2/ UL-1581	18	1	CCS	Solid	70	30	0.300	28	Quad
20CXDQ-RG6-CM-6	RG6	CM/CL2/ UL-1581	18	1	CCS	Solid	70	30	0.300	29	Quad
20CXDQ-RG6-CMP-1	RG6	CMP/CL2P/ UL-910	18	1	BC	Solid	70	30	0.228	30	Dual
20CXDQ-RG6-CMP-2	RG6	CMP/CL2P/ UL-910	18	1	CCS	Solid	70	30	0.230	25	Dual
20CXDQ-RG6-CMP-3	RG6	CMP/CL2P/ UL-910	18	1	CCS	Solid	70	30	0.275	29	Quad
20CXDQ-RG6-1	RG6		18	1	BC	Solid	70	30	0.264	32	Copper Braid
20CXDQ-RG6-2	RG6		18	1	BC	Solid	70	30	0.268	31	Copper Braid
20CXDQ-RG6-3	RG6		18	1	CCS	Solid	70	30	0.275	23	Dual
20CXDQ-RG6-4	RG6		18	1	CCS	Solid	70	30	0.300	26	Quad

All dimensions are nominal and subject to normal manufacturing tolerances