


MULTI-CONDUCTOR TYPE SOOW UL/CSA PORTABLE CORD, SO CONTROL (10 AWG)

- 600 V
- 90 °C
- 10 AWG

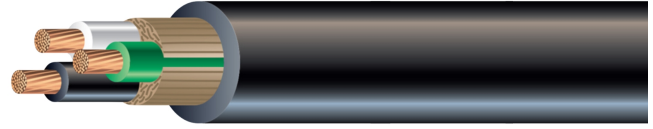

APPLICATIONS:

This cable can be used in control circuits, tools, and heavy industrial, processing and construction equipment.

CONSTRUCTION:

- 1 Conductor: Fully annealed stranded bare copper per ASTM B-174
- 2 Insulation: Premium-grade, color-coded 90°C EPDM
- 3 Jacket: CPE 90°C, black
- 4 Color Code: ICEA S-58-679, Method 1, table 1

STANDARDS & RATINGS:

- UL Flexible Cord - UL Subject 62
- CSA Flexible Cord
- MSHA Approved
- RoHS Compliant
- Temperature Rating: -40°C to 90°C

Part Number	No. of Conductors	Size (AWG)	Conductor Strand	Nominal O.D.	Approx Weight (lbs/1 M FT)
02C-1005-01	5	10	104/30	0.770"	472
02C-1006-01	6	10	104/30	0.875"	565
02C-1007-01	7	10	104/30	0.900"	552
02C-1008-01	8	10	104/30	0.935"	682
02C-1010-01	10	10	104/30	1.020"	758
02C-1012-01	12	10	104/30	1.070"	871
02C-1016-01	16	10	104/30	1.230"	1147
02C-1020-01	20	10	104/30	1.325"	1445