


MULTI-CONDUCTOR TYPE SOOW UL/CSA PORTABLE CORD, SO CONTROL (12 AWG)

- 600 V
- 90 °C
- 12 AWG

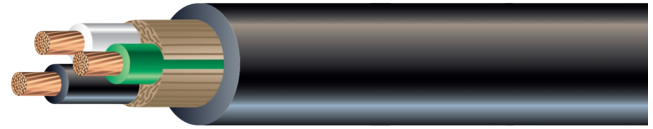

APPLICATIONS:

This cable can be used in control circuits, tools, and heavy industrial, processing and construction equipment.

CONSTRUCTION:

- 1 Conductor: Fully annealed stranded bare copper per ASTM B-174
- 2 Insulation: Premium-grade, color-coded 90°C EPDM
- 3 Jacket: CPE 90°C, black
- 4 Color Code: ICEA S-58-679, Method 1, table 1

STANDARDS & RATINGS:

- UL Flexible Cord - UL Subject 62
- CSA Flexible Cord
- MSHA Approved
- RoHS Compliant
- Temperature Rating: -40°C to 90°C

Part Number	No. of Conductors	Size (AWG)	Conductor Strand	Nominal O.D.	Approx Weight (lbs/1 M FT)
02C-1205-01	5	12	65/30	0.715"	333
02C-1206-01	6	12	65/30	0.740"	412
02C-1207-01	7	12	65/30	0.790"	465
02C-1208-01	8	12	65/30	0.825"	526
02C-1209-01	9	12	65/30	0.900"	517
02C-1210-01	10	12	65/30	1.000"	649
02C-1212-01	12	12	65/30	1.010"	669
02C-1214-01	14	12	65/30	1.020"	731
02C-1216-01	16	12	65/30	1.135	933
02C-1218-01	18	12	65/30	1.175"	920
02C-1220-01	20	12	65/30	1.170"	989
02C-1224-01	24	12	65/30	1.435"	1273
02C-1226-01	26	12	65/30	1.380"	1324
02C-1227-01	27	12	65/30	1.445"	1325
02C-1228-01	28	12	65/30	1.500"	1355
02C-1230-01	30	12	65/30	1.455"	1492
02C-1237-01	37	12	65/30	1.530"	1588