


MULTI-CONDUCTOR TYPE SOOW UL/CSA PORTABLE CORD, SO CONTROL (14 AWG)

- 600 V
- 90 °C
- 14 AWG

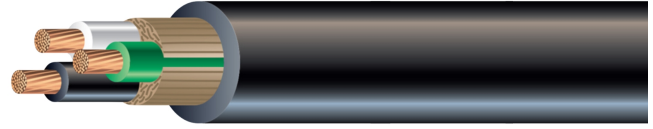

APPLICATIONS:

This cable can be used in control circuits, tools, and heavy industrial, processing and construction equipment.

CONSTRUCTION:

- 1 Conductor: Fully annealed stranded bare copper per ASTM B-174
- 2 Insulation: Premium-grade, color-coded 90°C EPDM
- 3 Jacket: CPE 90°C, black
- 4 Color Code: ICEA S-58-679, Method 1, table 1

STANDARDS & RATINGS:

- UL Flexible Cord - UL Subject 62
- CSA Flexible Cord
- MSHA Approved
- RoHS Compliant
- Temperature Rating: -40°C to 90°C

Part Number	No. of Conductors	Size (AWG)	Conductor Strand	Nominal O.D.	Approx Weight (lbs/1 M FT)
02C-1405-01	5	14	41/30	0.645"	269
02C-1406-01	6	14	41/30	0.710"	317
02C-1407-01	7	14	41/30	0.710"	347
02C-1408-01	8	14	41/30	0.760"	430
02C-1409-01	9	14	41/30	0.830"	417
02C-1410-01	10	14	41/30	0.820"	427
02C-1412-01	12	14	41/30	0.855"	493
02C-1414-01	14	14	41/30	1.000"	601
02C-1416-01	16	14	41/30	1.030"	678
02C-1418-01	18	14	41/30	1.100"	720
02C-1420-01	20	14	41/30	1.120"	806
02C-1424-01	24	14	41/30	1.260"	1003
02C-1428-01	28	14	41/30	1.330"	1080
02C-1430-01	30	14	41/30	1.335"	1153
02C-1437-01	37	14	41/30	1.420"	1224