


MULTI-CONDUCTOR TYPE SOOW UL/CSA PORTABLE CORD, SO CONTROL (16 AWG)

- 600 V
- 90 °C
- 16 AWG

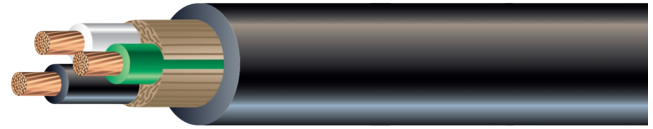

APPLICATIONS:

This cable can be used in control circuits, tools, and heavy industrial, processing and construction equipment.

CONSTRUCTION:

- 1 Conductor: Fully annealed stranded bare copper per ASTM B-174
- 2 Insulation: Premium-grade, color-coded 90°C EPDM
- 3 Jacket: CPE 90°C, black
- 4 Color Code: ICEA S-58-679, Method 1, table 1

STANDARDS & RATINGS:

- UL Flexible Cord - UL Subject 62
- CSA Flexible Cord
- MSHA Approved
- RoHS Compliant
- Temperature Rating: -40°C to 90°C

Part Number	No. of Conductors	Size (AWG)	Conductor Strand	Nominal O.D.	Approx Weight (lbs/1 M FT)
02C-1605-01	5	16	26/30	0.495"	152
02C-1606-01	6	16	26/30	0.520"	184
02C-1607-01	7	16	26/30	0.540"	210
02C-1608-01	8	16	26/30	0.575"	228
02C-1609-01	9	16	26/30	0.600"	255
02C-1610-01	10	16	26/30	0.620"	260
02C-1612-01	12	16	26/30	0.660"	319
02C-1614-01	14	16	26/30	0.730"	343
02C-1616-01	16	16	26/30	0.740"	367
02C-1618-01	18	16	26/30	0.770"	405
02C-1620-01	20	16	26/30	0.810"	444
02C-1622-01	22	16	26/30	0.900"	510
02C-1624-01	24	16	26/30	0.925"	547
02C-1626-01	26	16	26/30	0.965"	611
02C-1630-01	30	16	26/30	1.010"	685
02C-1637-01	37	16	26/30	1.070"	780