


MULTI-CONDUCTOR TYPE SOOW UL/CSA PORTABLE CORD, SO CONTROL (18 AWG)

- 600 V
- 90 °C
- 18 AWG

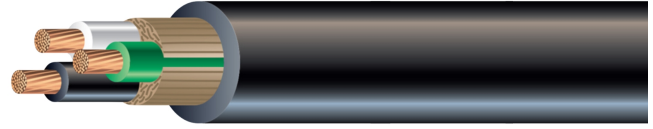

APPLICATIONS:

This cable can be used in control circuits, tools, and heavy industrial, processing and construction equipment.

CONSTRUCTION:

- 1 Conductor: Fully annealed stranded bare copper per ASTM B-174
- 2 Insulation: Premium-grade, color-coded 90°C EPDM
- 3 Jacket: CPE 90°C, black
- 4 Color Code: ICEA S-58-679, Method 1, table 1

STANDARDS & RATINGS:

- UL Flexible Cord - UL Subject 62
- CSA Flexible Cord
- MSHA Approved
- RoHS Compliant
- Temperature Rating: -40°C to 90°C

Part Number	No. of Conductors	Size (AWG)	Conductor Strand	Nominal O.D.	Approx Weight (lbs/1 M FT)
02C-1805-01	5	18	16/30	0.465"	131
02C-1806-01	6	18	16/30	0.495"	142
02C-1807-01	7	18	16/30	0.520"	161
02C-1808-01	8	18	16/30	0.530"	173
02C-1810-01	10	18	16/30	0.595"	221
02C-1812-01	12	18	16/30	0.600"	235
02C-1814-01	14	18	16/30	0.630"	262
02C-1816-01	16	18	16/30	0.700"	306
02C-1818-01	18	18	16/30	0.760"	341
02C-1820-01	20	18	16/30	0.795"	377
02C-1822-01	22	18	16/30	0.805"	400
02C-1824-01	24	18	16/30	0.850"	453
02C-1827-01	27	18	16/30	0.865"	475
02C-1830-01	30	18	16/30	0.915"	524