


TRAY CABLE UL TYPE TC / TC-ER 600V POWER CABLE THHN/THWN OVERALL SHIELD -14 AWG

- Power/ Control Cable
- 600 V
- 90 °C
- 14 AWG
- Shielded

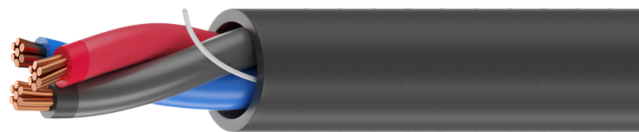

APPLICATIONS:

This Cable can be used in free air, raceways, and direct burial in wet or dry locations. Approved for direct burial, Class I, Div. 2 industrial hazardous locations per NEC. Permitted for Exposed Run use in accordance with NEC for 3 or more conductors.

CONSTRUCTION:

- 1 Conductor: Stranded bare copper to ASTM-B3, Class B stranding per ASTM-B8
- 2 Insulation: Color Coded Polyvinyl Chloride (PVC) with a Polyamide Nylon Covering
- 3 Jacket: Flame-retardant, Sunlight Resistant, Black Polyvinyl Chloride (PVC)

STANDARDS & RATINGS:

- UL 83 NEC Type THHN/THWN Conductors
- UL 1581
- FT4/IEEE 1202
- *UL 1277 Type TC-ER for 3 or More Conductors
- Rated for UV/Sunlight Resistant Applications
- Approved for Direct Burial

Part Number	No. of Conductors	Size (AWG)	Nominal Jacket Thickness	Nominal O.D.	Approx Weight (lbs/1M FT)
02A-1402S-01	2	14	0.045"	0.330"	67
02A-1403S-01	3	14	0.045"	0.350"	84
02A-1404S-01	4	14	0.045"	0.380"	104
02A-1405S-01	5	14	0.045"	0.400"	123
02A-1407S-01	7	14	0.045"	0.440"	240