


TYPE G-GC ROUND POWER CABLE (3 CONDUCTOR)

- Portable Power Cable
- 2000 V
- 90 °C (UL)

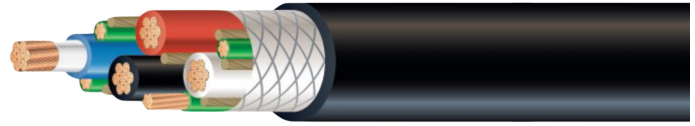

APPLICATIONS:

Industrial and light-to-medium-duty mining applications. Heavy-duty service as power supply cable. Mobile and portable electrical equipment. 3- and 4-conductor—use on three-phase AC systems where grounding is required.

CONSTRUCTION:

- 1 Conductor: Stranded bare copper
- 2 Insulation: Color-coded EPDM
- 3 Grounding Conductors: Stranded bare copper, insulation color: green
- 4 Ground Check Conductor: Stranded bare copper, insulation color: yellow
- 5 Jacket: Black CPE

STANDARDS & RATINGS:

- UL Type G-GC
- MSHA Approved
- RoHS Compliant

Part Number	No. of Conductor	Size (AWG or MCM)	Stranding	Nominal Conductor O.D.	Yellow Ground Check AWG Size	Green Ground Conductor AWG Size	Nominal Insulation Thickness	Nominal O.D.	Current Amps (1)	Approx Weight (lbs/1M FT)
07GC-0803-01	3	8	133	0.160"	10	2#10	0.060"	0.965"	65	600
07GC-0603-01	3	6	259	0.198"	10	2#10	0.060"	1.025"	87	770
07GC-0403-01	3	4	259	0.245"	10	2#8	0.060"	1.130"	114	1015
07GC-0203-01	3	2	259	0.297"	10	2#7	0.080"	1.345"	152	1480
07GC-0103-01	3	1	259	0.353"	8	2#6	0.080"	1.455"	177	1815
07GC-1013-01	3	1/0	259	0.385"	8	2#5	0.080"	1.585"	205	2245
07GC-2023-01	3	2/0	259	0.442"	8	2#4	0.080"	1.675"	237	2570
07GC-3033-01	3	3/0	259	0.480"	8	2#3	0.080"	1.810"	274	3230
07GC-4043-01	3	4/0	259	0.555"	8	2#2	0.080"	1.950"	316	3700
07GC-2503-01	3	250	627	0.615"	8	2#2	0.095"	2.390"	352	6060
07GC-3503-01	3	350	855	0.725"	8	2#1/0	0.095"	2.680"	433	7400
07GC-5003-01	3	500	1235	0.880"	8	2#2/0	0.095"	3.030"	536	10100